




SN# 290572-10 Lamp Specific Acceptance Test

| Model: Nomad GO | Result | Steady State | Acceptable | Units |
|--|--------|--------------|------------|--------------------|
| Peak Output Wavelength | Pass | 367 ✓ | 365 ± 5 | nm |
| Full Width Half Maximum (FWHM) | Pass | 13 ✓ | ≤ 15 | nm |
| Full Width at 10% Maximum | Pass | 24 ✓ | ≤ 30 | nm |
| Longest Wavelength at Half Maximum | Pass | 375 ✓ | ≤ 377 | nm |
| Max Excitation Irradiance (347-382 nm) | Pass | 3701 ✓ | ≥ 2000 | μW/cm ² |

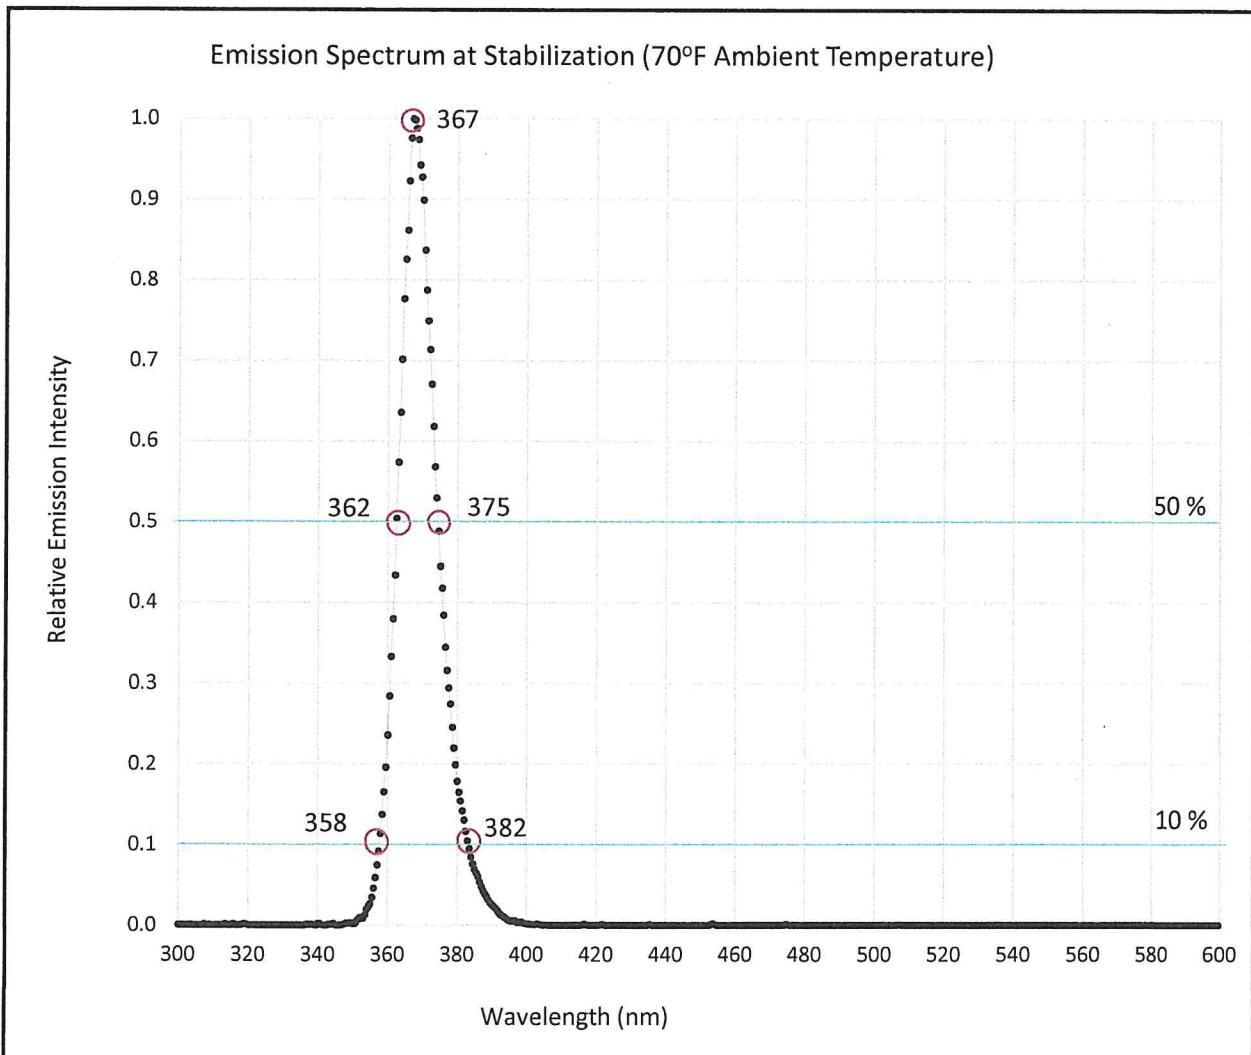

Inspector: YEP
Date of Certification: 6-26-2024

This lamp has been tested to conform to all requirements of:
ASTM E3022 ✓ AITM6-1001 ✓ ISO 3059 ✓ RRES 90061 ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 16060829, Certificate Number 16060829-UV-CR2-1223



C4 Nomad Series, Certificate of Conformance

| SN# 290572-10 | Switch On | Steady State | Elevated Temp* | Acceptable | Units |
|--|-----------|--------------|----------------|------------|--------------------|
| Peak Output Wavelength | 366 | 367 | 370 | 365 ± 5 | nm |
| Full Width Half Maximum (FWHM) | 13 | 13 | 13 | ≤ 15 | nm |
| Full Width at 10% Maximum | 24 | 24 | 26 | ≤ 30 | nm |
| Longest Wavelength at Half Maximum | 374 | 375 | 376 | ≤ 377 | nm |
| Visible Emission at 15 in | 9 | 8 | 8 | ≤ 20 | Lux |
| Visible Emission at 36 in | 3 | 3 | 3 | ≤ 5 | Lux |
| Irradiated Area at 15 in (>1000 μW/cm ²) | 11 | 10 | 9 | ≥ 5 | Inch Diameter |
| Max Excitation Irradiance (347-382 nm) | 4,071 | 3,701 | 2,400 | ≥ 2000 | μW/cm ² |
| Irradiance at Peak Output Wavelength | 312 | 284 | 185 | - | μW/cm ² |
| Min Working Distance** (< 5000 μW/cm ²) | 13 | 11 | 10 | - | Inches |
| Max Working Distance** (> 1200 μW/cm ²) | 27 | 23 | 21 | - | Inches |
| Body Stabilization Temp (70°F Ambient) | - | 116 | - | ≤ 120 | °F |
| Current Ripple | 9 | 9 | 9 | ≤ 35 | mA peak-peak |
| Typical Battery Discharge Time (36Wh Batt) | - | 150 | - | - | Minutes |

* Tested in a 110°F Environment, the maximum ambient temperature where still light meets requirements

** C4 Nomad series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

