


SN# 290760-02 Lamp Specific Acceptance Test



Model: Nomad	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	368 $\checkmark$	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	12 $\checkmark$	≤ 15	nm
Full Width at 10% Maximum	Pass	26 $\checkmark$	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375 $\checkmark$	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	3571 $\checkmark$	≥ 2000	$\mu\text{W}/\text{cm}^2$

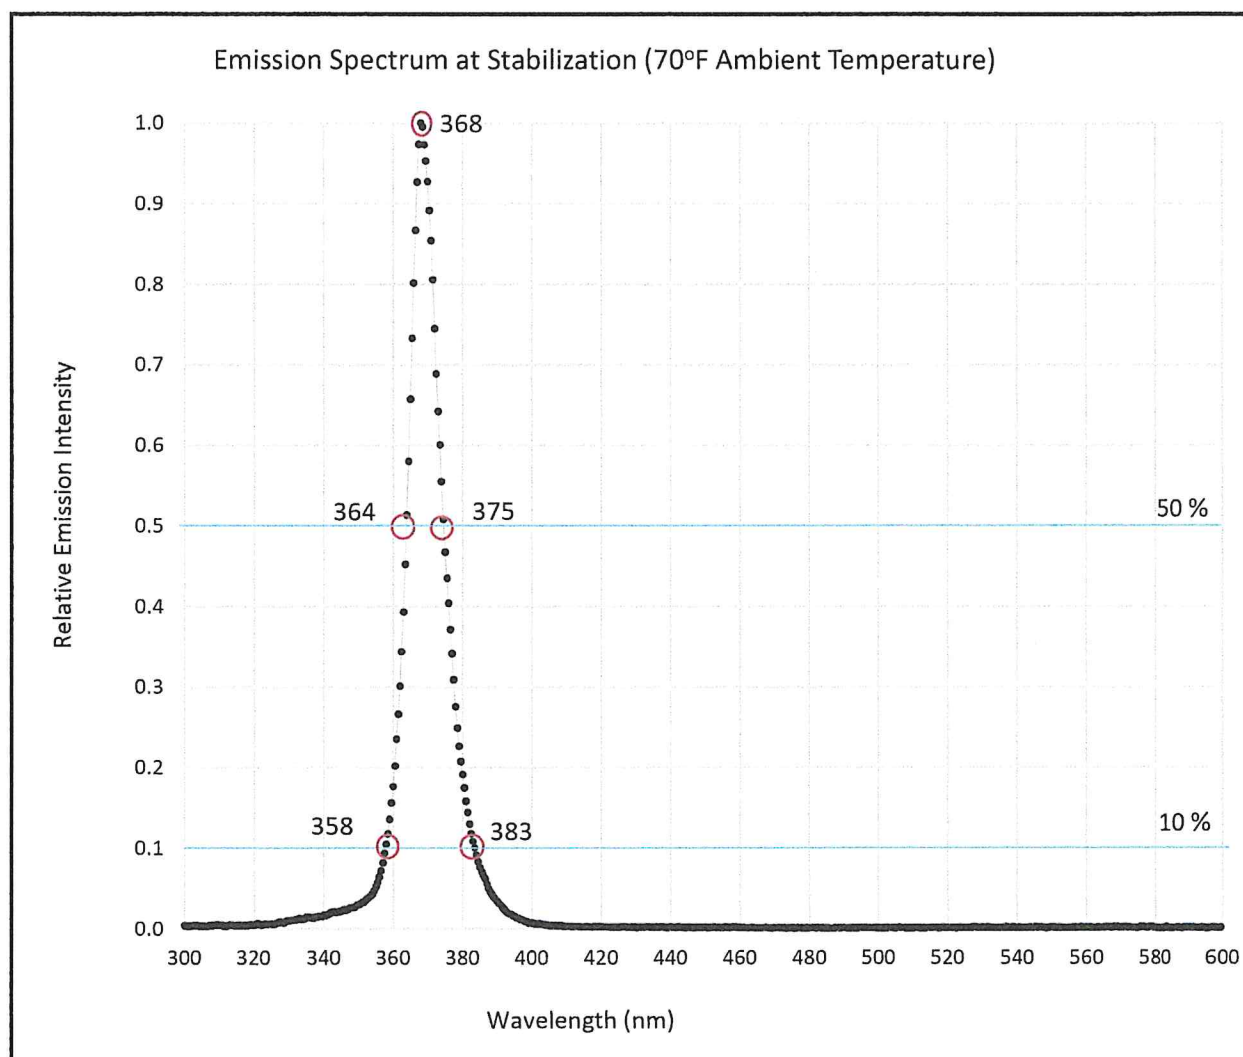

Inspector: MHP
 Date of Certification: 4-3-2025

This lamp has been tested to conform to all requirements of:
 ASTM E3022 $\checkmark$ AITM6-1001 $\checkmark$ ISO 3059 $\checkmark$ RRES 90061 $\checkmark$

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 22011404, Certificate Number 22011404-UV-CR2-1124



C4 Nomad Series, Certificate of Conformance



SN# 290760-02	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	367	368	369	365 ± 5	nm
Full Width Half Maximum (FWHM)	12	12	13	≤ 15	nm
Full Width at 10% Maximum	26	26	26	≤ 30	nm
Longest Wavelength at Half Maximum	374	375	377	≤ 377	nm
Visible Emission at 15 in	15	13	9	≤ 20	Lux
Visible Emission at 36 in	3	3	3	≤ 5	Lux
Irradiated Area at 15 in ($>1000 \mu\text{W}/\text{cm}^2$)	11	10	9	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	3,928	3,571	2,400	≥ 2000	$\mu\text{W}/\text{cm}^2$
Irradiance at Peak Output Wavelength	313	284	185	-	$\mu\text{W}/\text{cm}^2$
Min Working Distance** ($< 5000 \mu\text{W}/\text{cm}^2$)	13	11	10	-	Inches
Max Working Distance** ($> 1200 \mu\text{W}/\text{cm}^2$)	25	21	19	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	°F
Current Ripple	9	9	9	≤ 35	mA peak-peak
Typical Battery Discharge Time (36Wh Batt)	-	150	-		Minutes

* Tested in a 110° F Environment, the maximum ambient temperature where still light meets requirements

** C4 Nomad series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

