


SN# 23120711 Lamp Specific Acceptance Test



Model: Magnum	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	368 ✓	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	11 ✓	≤ 15	nm
Full Width at 10% Maximum	Pass	24 ✓	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375 ✓	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	4139 ✓	≥ 2000	μW/cm ²

Emission Spectrum at Stabilization (70°F Ambient Temperature)

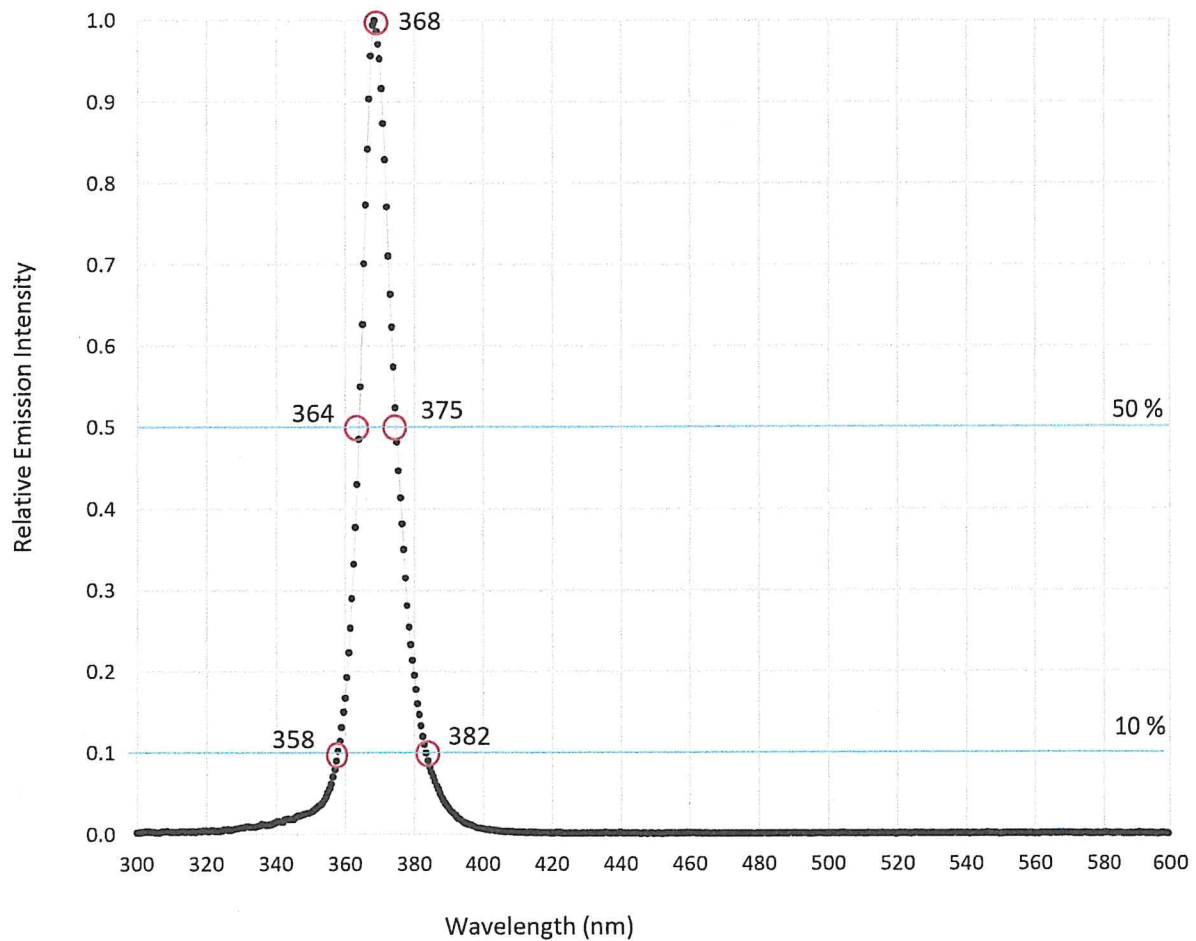

Inspector:

MHP

Date of Certification:

2-28-2025

This lamp has been tested to conform to all requirements of:

ASTM E3022 ✓

AITM6-1001 ✓

ISO 3059 ✓

RRES 90061 ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 22011404, Certificate Number 22011404-UV-CR2-1124

C4 Magnum Series, Certificate of Conformance



SN# 23120711_magnum_recert1	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	367	368	369	365 ± 5	nm
Full Width Half Maximum (FWHM)	11	11	13	≤ 15	nm
Full Width at 10% Maximum	24	24	25	≤ 30	nm
Longest Wavelength at Half Maximum	374	375	375	≤ 377	nm
Visible Emission at 15 in	9	8	8	≤ 20	Lux
Visible Emission at 36 in	3	3	3	≤ 5	Lux
Irradiated Area at 15 in ($>1000 \mu\text{W}/\text{cm}^2$)	11	10	9	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	5,173	4,139	2,400	$\geq 2,000$	$\mu\text{W}/\text{cm}^2$
Irradiance at Peak Output Wavelength	413	330	185	-	$\mu\text{W}/\text{cm}^2$
Min Working Distance** ($< 5000 \mu\text{W}/\text{cm}^2$)	15	14	13	-	Inches
Max Working Distance** ($> 1200 \mu\text{W}/\text{cm}^2$)	26	23	21	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	°F
Current Ripple	9	9	9	≤ 35	mA peak-peak

* Tested in a 110°F Environment, the maximum ambient temperature where still light meets all requirements

** C4 Magnum series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

