




SN# 001850 Lamp Specific Acceptance Test

Model: UV-3400, Nomad-GO	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	369 $\checkmark$	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	12 $\checkmark$	≤ 15	nm
Full Width at 10% Maximum	Pass	23 $\checkmark$	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	376 $\checkmark$	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	3244 $\checkmark$	≥ 2000	$\mu\text{W}/\text{cm}^2$

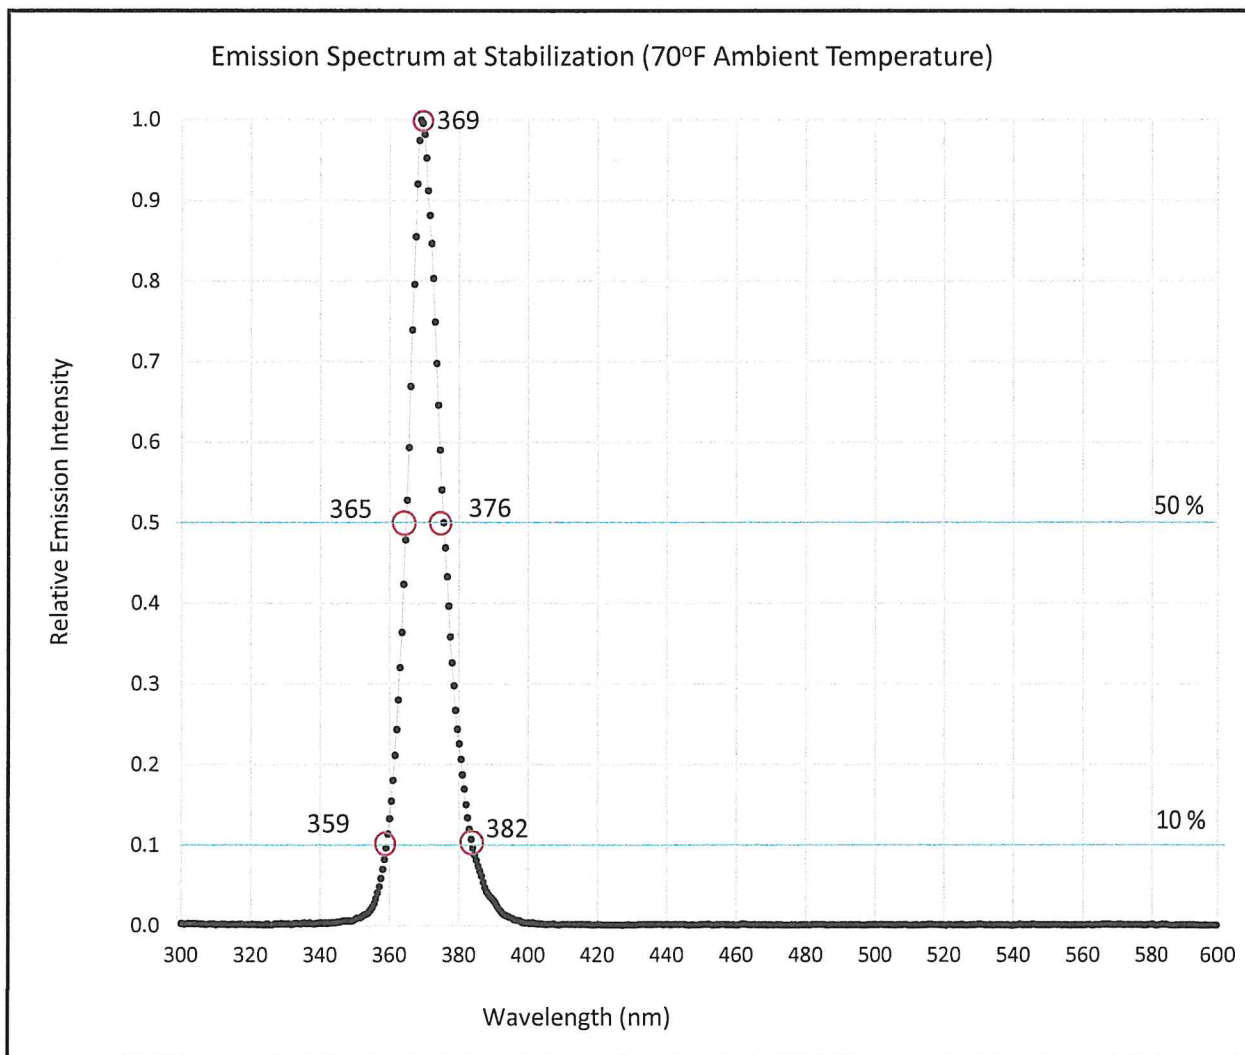

Inspector: MR

Date of Certification: 9-11-2026

This lamp has been tested to conform to all requirements of:

ASTM E3022 $\checkmark$ AITM6-1001 $\checkmark$ ISO 3059 $\checkmark$ RRES 90061 $\checkmark$

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 26011309, Certificate Number 26011309-UV-CR2-0126

C4 Nomad Series, Certificate of Conformance



SN# 001850	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	368	369	370	365 ± 5	nm
Full Width Half Maximum (FWHM)	12	12	13	≤ 15	nm
Full Width at 10% Maximum	23	23	26	≤ 30	nm
Longest Wavelength at Half Maximum	375	376	376	≤ 377	nm
Visible Emission at 15 in	9	8	8	≤ 20	Lux
Visible Emission at 36 in	3	3	3	≤ 5	Lux
Irradiated Area at 15 in ($>1000 \mu\text{W}/\text{cm}^2$)	11	10	9	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	3,407	3,244	2,400	≥ 2000	$\mu\text{W}/\text{cm}^2$
Irradiance at Peak Output Wavelength	278	265	185	-	$\mu\text{W}/\text{cm}^2$
Min Working Distance** ($< 5000 \mu\text{W}/\text{cm}^2$)	13	11	10	-	Inches
Max Working Distance** ($> 1200 \mu\text{W}/\text{cm}^2$)	27	23	21	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	°F
Current Ripple	9	9	9	≤ 35	mA peak-peak
Typical Battery Discharge Time (36Wh Batt)	-	150	-		Minutes

* Tested in a 110°F Environment, the maximum ambient temperature where light still meets all requirements

** C4 Nomad series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

