
SN# 002390 Lamp Specific Acceptance Test

Model: UV-3400, Nomad-GO	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	369	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	11	≤ 15	nm
Full Width at 10% Maximum	Pass	23	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	3616	≥ 2000	$\mu W/cm^2$

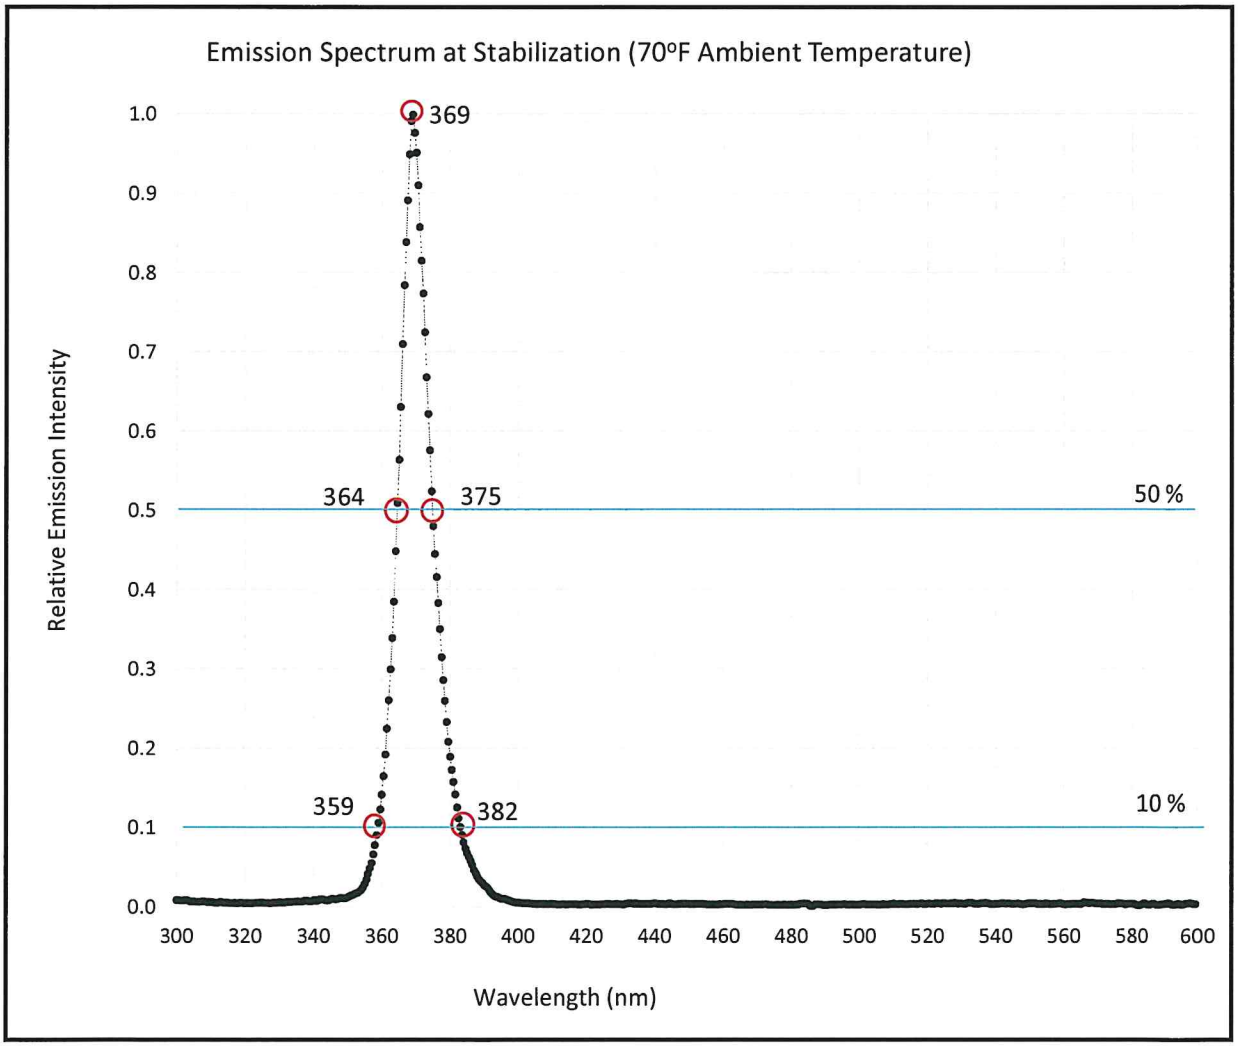

Inspector: QR

Date of Certification: 10·22·2026

This lamp has been tested to conform to all requirements of:

ASTM E3022 ✓ **AITM6-1001** ✓ **ISO 3059** ✓ **RRES 90061** ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 26011309, Certificate Number 26011309-UV-CR2-0126

REL INC. CONFORMANCE SEAL 2006 MICHIGAN

C4 Nomad Series, Certificate of Conformance

SN# 002390	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	368	369	370	365 ± 5	nm
Full Width Half Maximum (FWHM)	11	11	13	≤ 15	nm
Full Width at 10% Maximum	23	23	26	≤ 30	nm
Longest Wavelength at Half Maximum	374	375	376	≤ 377	nm
Visible Emission at 15 in	9	8	8	≤ 20	Lux
Visible Emission at 36 in	3	3	3	≤ 5	Lux
Irradiated Area at 15 in (>1000 µW/cm^2)	11	10	9	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	3,797	3,616	2,400	≥ 2000	µW/cm^2
Irradiance at Peak Output Wavelength	319	303	185	-	µW/cm^2
Min Working Distance** (< 5000 µW/cm^2)	13	11	10	-	Inches
Max Working Distance** (> 1200 µW/cm^2)	27	23	21	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	°F
Current Ripple	9	9	9	≤ 35	mA peak-peak
Typical Battery Discharge Time (36Wh Batt)	-	150	-		Minutes

** Tested in a **110° F** Environment, the **maximum ambient temperature where light still meets all requirements***

*** C4 Nomad series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)*

