C4 Magnum Series, Certificate of Conformance

SN# 002449	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	368	369	370	365 ± 5	**nm**
Full Width Half Maximum (FWHM)	11	11	13	≤ 15	**nm**
Full Width at 10% Maximum	22	22	27	≤ 30	**nm**
Longest Wavelength at Half Maximum	373	374	376	≤ 377	**nm**
Visible Emission at 15 in	9	8	8	≤ 20	**Lux**
Visible Emission at 36 in	3	3	3	≤ 5	**Lux**
Irradiated Area at 15 in (>1000 µW/cm^2)	11	10	9	≥ 5	**Inch Diameter**
Max Excitation Irradiance (347-382 nm)	3,973	3,784	2,400	≥ 2,000	**µW/cm^2**
Irradiance at Peak Output Wavelength	343	327	185	-	**µW/cm^2**
Min Working Distance** (< 5000 µW/cm^2)	14	12	11	-	**Inches**
Max Working Distance** (> 1200 µW/cm^2)	26	23	21	-	**Inches**
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	**°F**
Current Ripple	9	9	9	≤ 35	**mA peak-peak**

** Tested in a **110° F** Environment, the **maximum ambient temperature where light still meets all requirements***

*** C4 Magnum series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)*

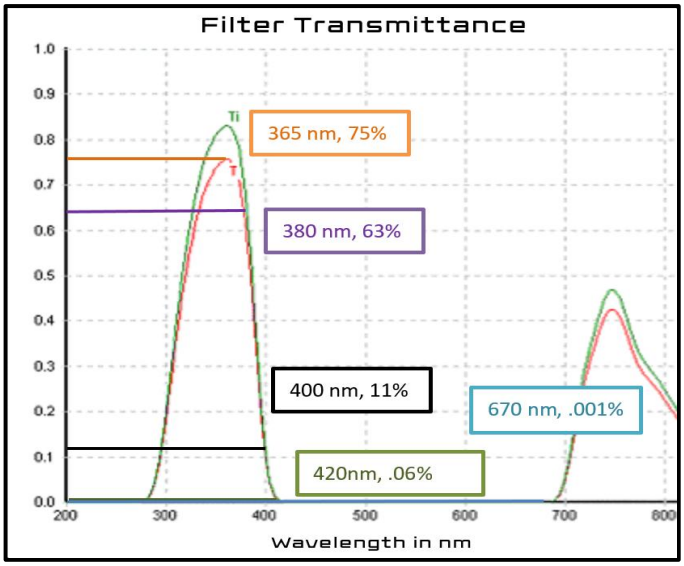

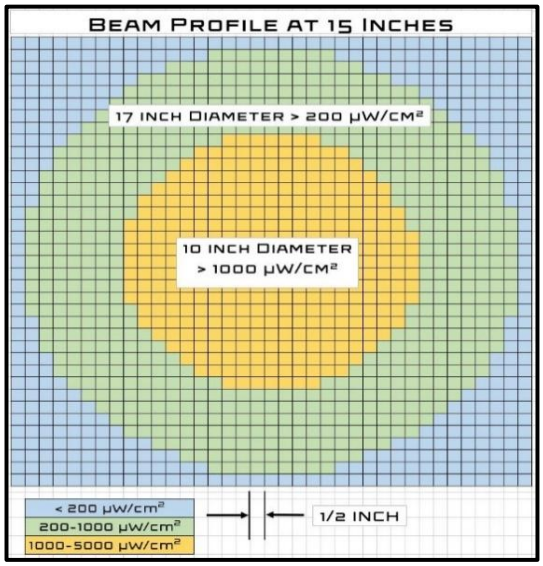

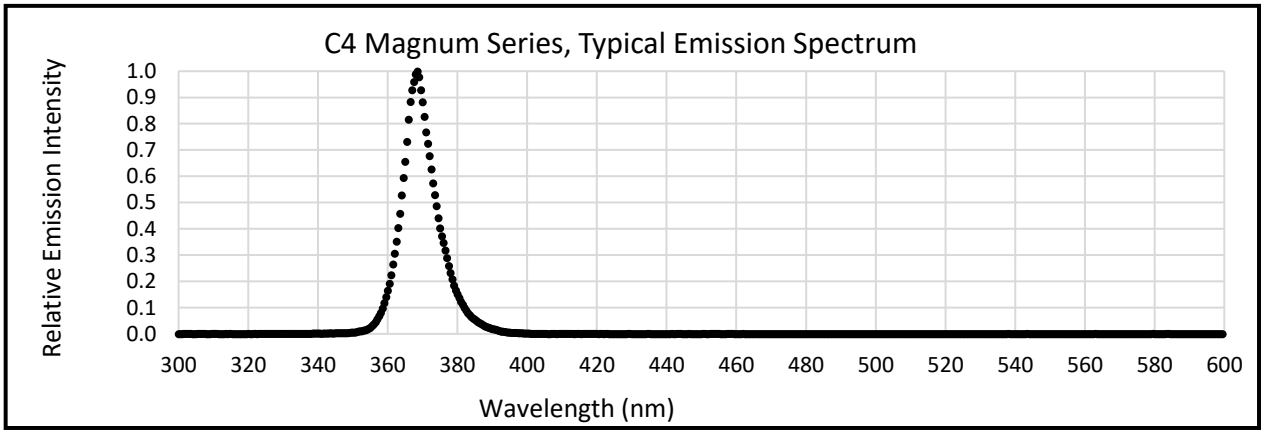

SN# 002449 Lamp Specific Acceptance Test

Model: UV-3000, Magnum-GO	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	369	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	11	≤ 15	nm
Full Width at 10% Maximum	Pass	22	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	374	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	3784	≥ 2000	$\mu W/cm^2$

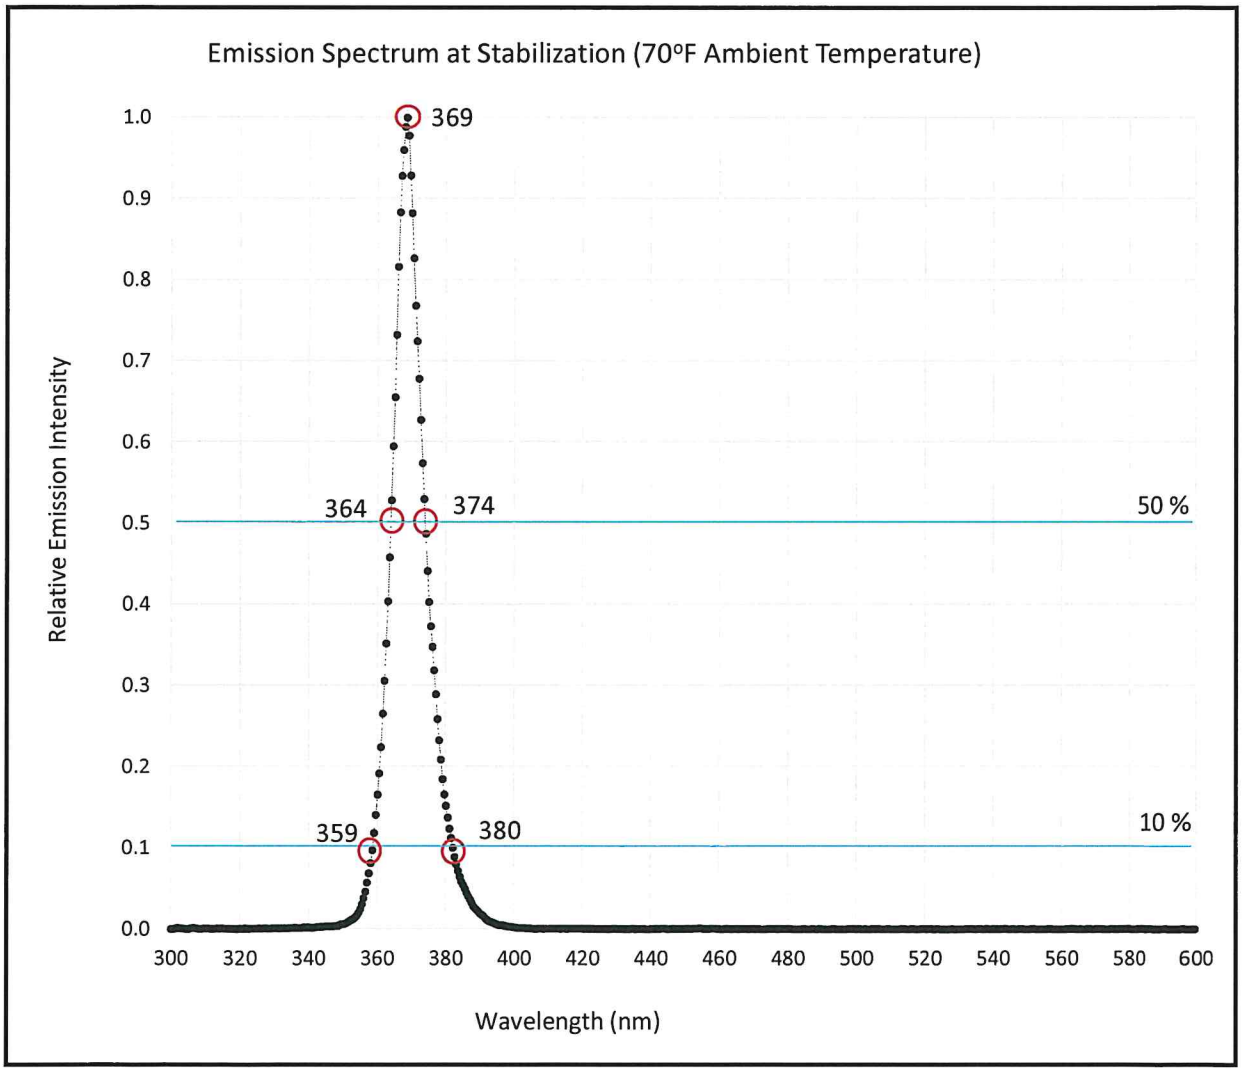

Inspector: QAR

Date of Certification: 11-2-2026

This lamp has been tested to conform to all requirements of:

ASTM E3022 ✓ **AITM6-1001** ✓ **ISO 3059** ✓ **RRES 90061** ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 26011309, Certificate Number 26011309-UV-CR2-0126

REL, INC. SEAL 2006 MICHIGAN