




# SN# 290573-01 Lamp Specific Acceptance Test

Model: Magnum	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	368 ✓	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	12 ✓	≤ 15	nm
Full Width at 10% Maximum	Pass	24 ✓	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375 ✓	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	3932 ✓	≥ 2000	μW/cm <sup>2</sup>

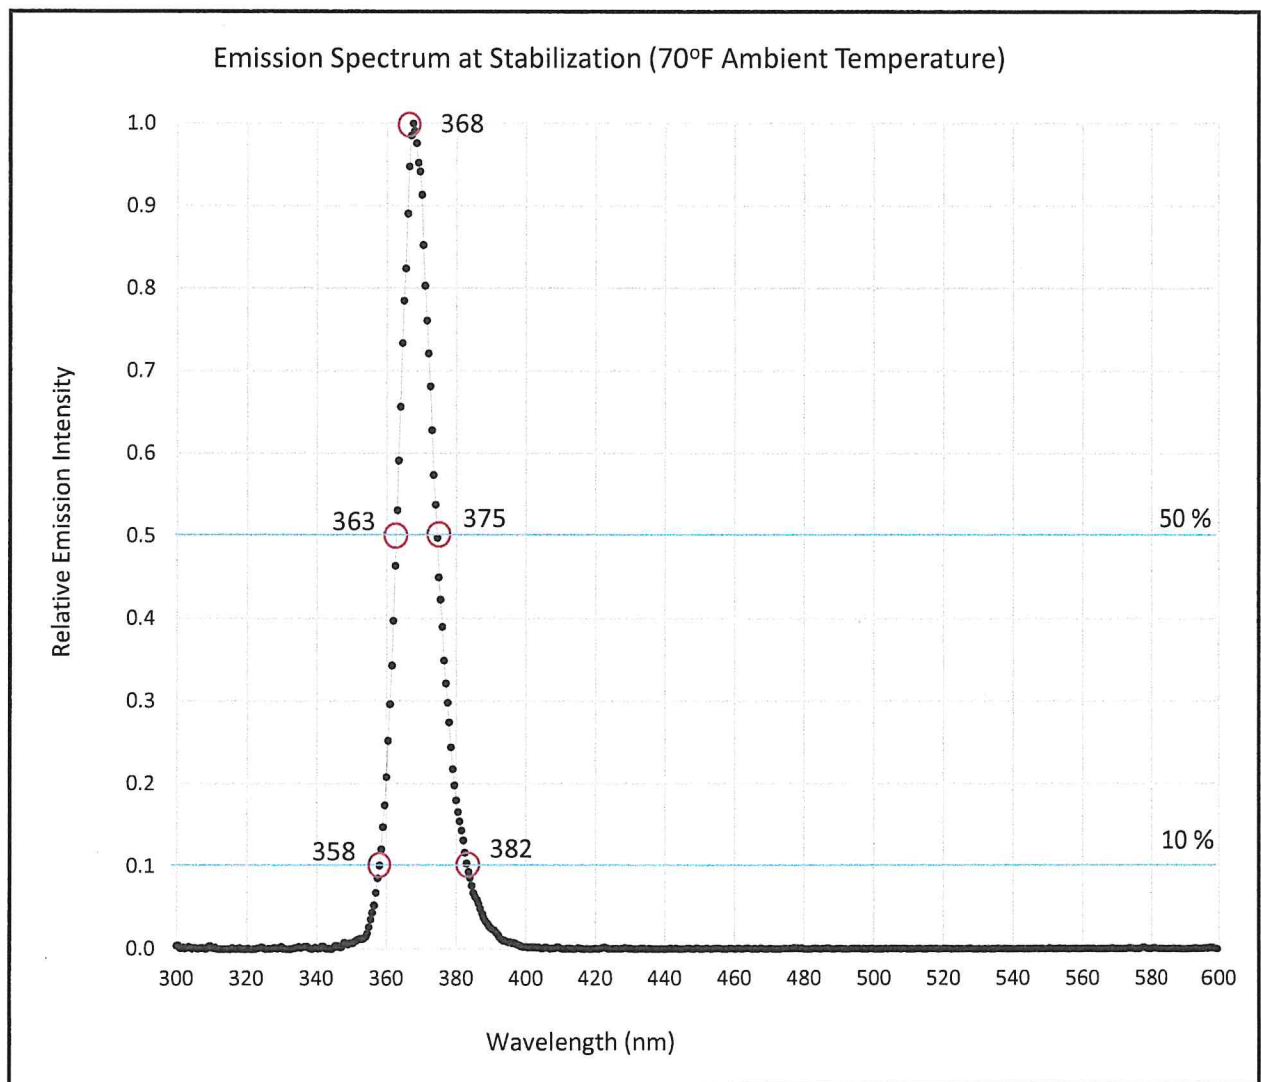

Inspector: NEP  
Date of Certification: 5.30.2024

This lamp has been tested to conform to all requirements of:  
ASTM E3022 ✓ AITM6-1001 ✓ ISO 3059 ✓ RRES 90061 ✓

# C4 Magnum Series, Certificate of Conformance



SN# 290573-01	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	367	368	369	365 ± 5	nm
Full Width Half Maximum (FWHM)	12	12	13	≤ 15	nm
Full Width at 10% Maximum	24	24	26	≤ 30	nm
Longest Wavelength at Half Maximum	374	375	376	≤ 377	nm
Visible Emission at 15 in	7	6	6	≤ 20	Lux
Visible Emission at 36 in	3	3	3	≤ 5	Lux
Irradiated Area at 15 in (>1000 μW/cm <sup>2</sup> )	11	10	9	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	4,326	3,932	2,400	≥ 2,000	μW/cm <sup>2</sup>
Irradiance at Peak Output Wavelength	337	306	185	-	μW/cm <sup>2</sup>
Min Working Distance** (< 5000 μW/cm <sup>2</sup> )	15	14	13	-	Inches
Max Working Distance** (> 1200 μW/cm <sup>2</sup> )	26	23	21	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	°F
Current Ripple	9	9	9	≤ 35	mA peak-peak

\* Tested in a 110°F Environment, the maximum ambient temperature where still light meets all requirements

\*\* C4 Magnum series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

