




SN# 290533-09 Lamp Specific Acceptance Test

Model: Nomad-Ascent	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	368 ✓	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	11 ✓	≤ 15	nm
Full Width at 10% Maximum	Pass	24 ✓	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375 ✓	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	1439 ✓	≥ 1200	μW/cm ²

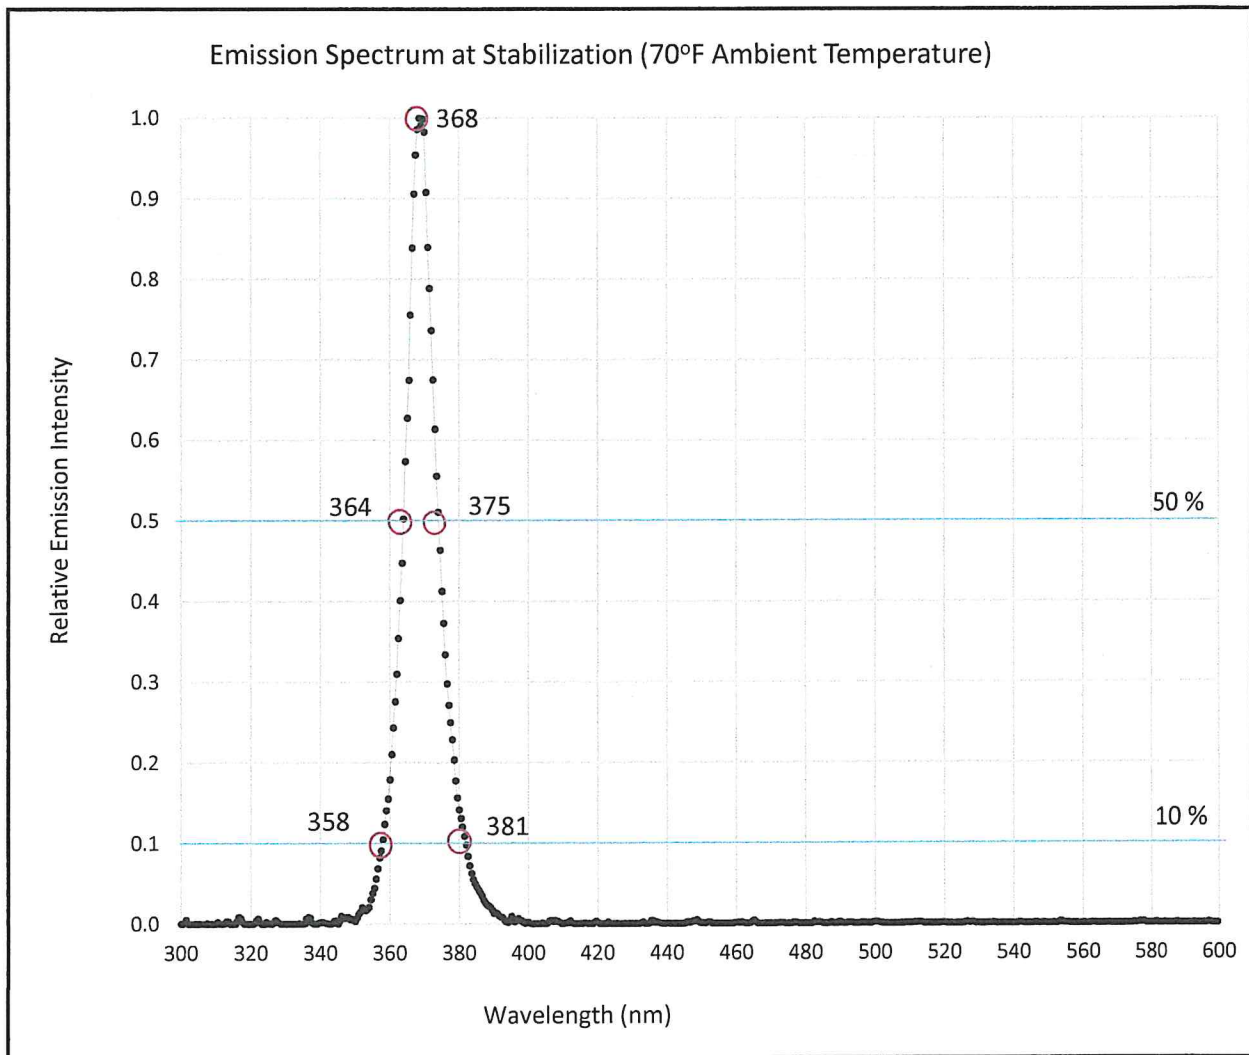

Inspector: VFP
Date of Certification: 6-26-2024

This lamp has been tested to conform to all requirements of:
ASTM E3022 ✓ AITM6-1001 ✓ ISO 3059 ✓ RRES 90061 ✓



Nomad-Ascent, Certificate of Conformance

SN# 290533-09	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	367	368	370	365 ± 5	nm
Full Width Half Maximum (FWHM)	11	11	12	≤ 15	nm
Full Width at 10% Maximum	24	24	24	≤ 30	nm
Longest Wavelength at Half Maximum	375	375	375	≤ 377	nm
Visible Emission at 15 in	8	6	5	≤ 20	Lux
Visible Emission at 36 in	2	2	2	≤ 5	Lux
Irradiated Area at 15 in (>1000 μW/cm ²)	12	8	7	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	1,798	1,439	1,200	≥ 1000	μW/cm ²
Irradiance at Peak Output Wavelength	152	121	102	-	μW/cm ²
Min Working Distance** (< 5000 μW/cm ²)	9	8	8	-	Inches
Max Working Distance** (> 1200 μW/cm ²)	17	16	15	-	Inches
Handle Stabilization Temp (70°F Ambient)	-	120	-	≤ 120	°F
Current Ripple	26	26	26	≤ 58	mA peak-peak
Typical Battery Discharge Time (18Wh Batt)	-	95	-	-	Minutes

* Tested in a 85 ° F Environment, the maximum ambient temperature where still light meets requirements

** Nomad-Ascent has tightly grouped LED emitters, thus beam uniformity does not change with working distance (RRES 90061)

