




## SN# 21121003 Lamp Specific Acceptance Test


| Model: UV-3400, Nomad-GO               | Result | Steady State | Acceptable  | Units                     |
|----------------------------------------|--------|--------------|-------------|---------------------------|
| Peak Output Wavelength                 | Pass   | 368 ✓        | $365 \pm 5$ | nm                        |
| Full Width Half Maximum (FWHM)         | Pass   | 12 ✓         | $\leq 15$   | nm                        |
| Full Width at 10% Maximum              | Pass   | 24 ✓         | $\leq 30$   | nm                        |
| Longest Wavelength at Half Maximum     | Pass   | 375 ✓        | $\leq 377$  | nm                        |
| Max Excitation Irradiance (347-382 nm) | Pass   | 4219 ✓       | $\geq 2000$ | $\mu\text{W}/\text{cm}^2$ |

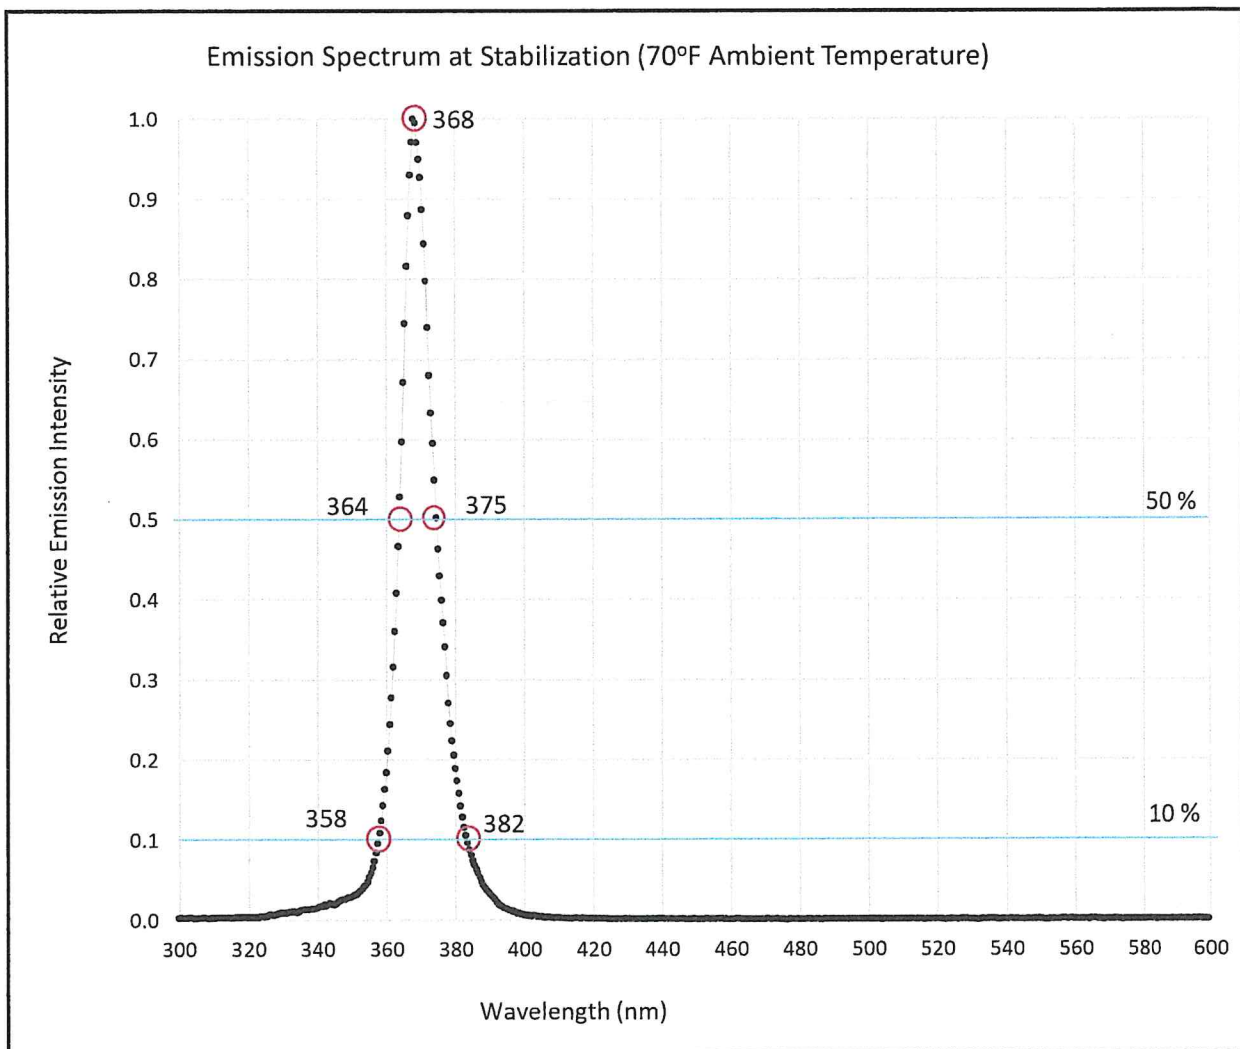

Inspector: MHP  
Date of Certification: 02-2-2025

This lamp has been tested to conform to all requirements of:  
ASTM E3022 ✓ AITM6-1001 ✓ ISO 3059 ✓ RRES 90061 ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 22011404, Certificate Number 22011404-UV-CR2-1124



## C4 Nomad Series, Certificate of Conformance



| SN# 21121003_nomadgo_recert4                                 | Switch On | Steady State | Elevated Temp* | Acceptable  | Units                     |
|--------------------------------------------------------------|-----------|--------------|----------------|-------------|---------------------------|
| Peak Output Wavelength                                       | 367       | 368          | 369            | $365 \pm 5$ | nm                        |
| Full Width Half Maximum (FWHM)                               | 12        | 12           | 13             | $\leq 15$   | nm                        |
| Full Width at 10% Maximum                                    | 24        | 24           | 25             | $\leq 30$   | nm                        |
| Longest Wavelength at Half Maximum                           | 374       | 375          | 376            | $\leq 377$  | nm                        |
| Visible Emission at 15 in                                    | 9         | 8            | 8              | $\leq 20$   | Lux                       |
| Visible Emission at 36 in                                    | 3         | 3            | 3              | $\leq 5$    | Lux                       |
| Irradiated Area at 15 in ( $>1000 \mu\text{W}/\text{cm}^2$ ) | 11        | 10           | 9              | $\geq 5$    | Inch Diameter             |
| Max Excitation Irradiance (347-382 nm)                       | 4,641     | 4,219        | 2,400          | $\geq 2000$ | $\mu\text{W}/\text{cm}^2$ |
| Irradiance at Peak Output Wavelength                         | 368       | 335          | 185            | -           | $\mu\text{W}/\text{cm}^2$ |
| Min Working Distance** ( $< 5000 \mu\text{W}/\text{cm}^2$ )  | 14        | 12           | 11             | -           | Inches                    |
| Max Working Distance** ( $> 1200 \mu\text{W}/\text{cm}^2$ )  | 27        | 23           | 21             | -           | Inches                    |
| Body Stabilization Temp (70°F Ambient)                       | -         | 116          | -              | $\leq 120$  | °F                        |
| Current Ripple                                               | 9         | 9            | 9              | $\leq 35$   | mA peak-peak              |
| Typical Battery Discharge Time (36Wh Batt)                   | -         | 150          | -              |             | Minutes                   |

\* Tested in a 110°F Environment, the maximum ambient temperature where still light meets requirements

\*\* C4 Nomad series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

